

ASSA ABLOY Entrance Systems is a leading supplier of entrance automation solutions for efficient flow of goods and people. With our worldwide presence we offer products and services dedicated to satisfying end-user needs for safe, secure, convenient and sustainable operations. ASSA ABLOY Entrance Systems is a division within ASSA ABLOY.



www.assaabloyentrance.com

ASSA ABLOY Entrance Systems
Albany Door Systems

www.albanydoors.com

QR-Code

Get further informations by scanning the QR-code with your smartphone and a appropriate application.



RapidStore

Strip curtains – an economical solution

ALBANY

ASSA ABLOY

Technical data sheet

ASSA ABLOY, the global leader
in door opening solutions



Strip curtains RapidStore





CHOICE OF STRIPS AND FIXING SYSTEMS


MODEL	2/80	3/60	3/66	3/100	4/50	4/60	4/100
Strip size	200 x 2	300 x 3	300 x 3	300 x 3	400 x 4	400 x 4	400 x 4
Fixing type	ACD	ACD	E	ACDE	E	ACD	ACDE
Overlap in %	80	60	66	100	50	60	100
Overlap in mm	80	90	100	150	100	120	200

FIXING SYSTEMS


swivell mounted

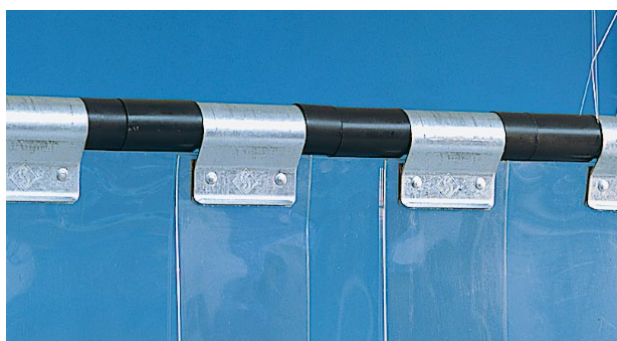

Ceiling fixing




Sliding guide ways
If required also available under lintel on 2 rails



In front of lintel

rigid fixed

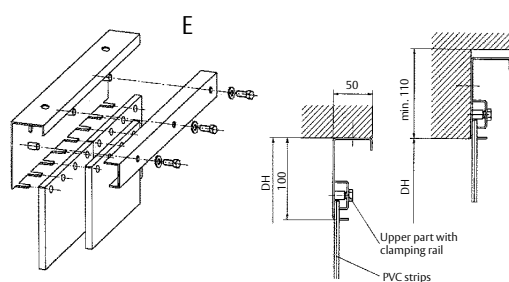

Upper part with clamping rail
PVC strips

APPLICATION

Strip Curtains are designed to be used for:

- closing of large doorways
- partitioning parts of a building with different temperature areas.
- protecting machines and installations in production areas against dust, chips, splashes, sparks, etc.

DESIGN

The strips are made of transparent PVC.

For all models with exception of type 2/80 and plast-K for cold stores, the end strips are coloured in red for safety reasons.

All strips are individually fixed, which means that they can easily be replaced.

All metal parts are galvanised, giving them good protection against corrosion.

Supplied as self-assembly kit.

Selecting the correct strip thickness and overlapping is crucial for the effectiveness of the strip curtain.

The strip curtain RapidStore is available in different models. The first figure is the thickness of the strip material in mm and the second figure shows the overlapping in percent.

Example:

RapidStore 4/50:

strip thickness = 4mm, overlapping = 50%.

SURFACE

All metal parts are galvanised.

STRIPS

The strips are made of transparent PVC. Depending on special applications you can choose between different strip widths and strip thicknesses. Available strips width are 200, 300 and 400 mm and strip thicknesses 2, 3 and 4 mm. For safety side strips are coloured in red, exceptions are model 2/80 and plast-K for use in cold stores.

FIXING SYSTEMS

Fixing system can be chosen between a swivel mounted with hinged shaft (model SE) or a rigid fixed version with clamping section for mounting under or in front of the lintel (model E).

TECHNICAL DATA	RapidStore SE	RapidStore E
Interior door	suitable	suitable
Exterior door	partially suitable	partially suitable
Door dimension in mm (DW min./max.) (DH min./max.)	according to customer specification 6000 mm	6000 mm

Surface	
Side frame	galvanised steel
Streifen	plast-standard type transparent with red plast side strips for safety (not for model 2/80 and plast-K) plast-K for cold stores

Fixing Systems	
Fixing	swivell rigid
Fixing type	hinged shaft Model A,C,D for mounting under or in front of the lintel clamping section Model E

